



# SIGILTEX

**D10**VERSION: 121212  
Page:1/1

## BRUSHABLE SEALER

### DEFINITION

**SIGILTEX** is a one-component brushable sealer used in car refinishing for the sealing of all bodywork joints, boots, wheel arches, etc. It has excellent sealing characteristics as well as being very resistant to torsion, water and vibrations. All of these characteristics remain unchanged for a lifetime.


The low solvent content and the high quantity of resin used guarantees an excellent adhesion and a very high cohesion to any kind of supporting surface, and even with thick applications the paint will not break.

**SIGILTEX** can be overpainted with any kind of paint.

### PHYSICAL CHARACTERISTICS

<b>Nature:</b>	Elastomers and synthetic resins
<b>Colour:</b>	Metallic grey
<b>Specific weight:</b>	1,1 kg/l at 20°C
<b>VOC:</b>	2004/42/EC - IIB(b)(250) <250g/l

### APPLICATION

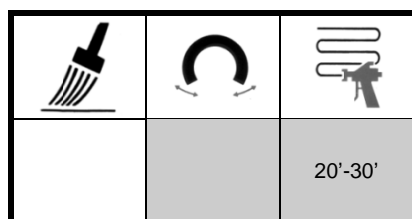

### REMARKS

Clean and degrease the part to be treated. Brush on with smooth continuous strokes, always in the same direction. Do not re-touch more than 3 minutes after application.

It is recommended to overpaint approximately at 1 or 2 hours minimum if oven dried, to avoid solvent popping.

### EQUIPMENT CLEANING

Clean with a cleaning thinner.

### SAFETY

Follow instructions of product label. For more information check the Safety Data Sheet. Compliant with the National Statutory Regulation for Health and Safety at Work and Waste Disposal.

### STORAGE

Store the product in a ventilated place far from direct exposure to sunlight. Keep between +5°C and +30°C.

### GUARANTEE

In unopened original packaging, one year from manufacturing date.

For any technical information contact with our Customer Attention Service or our Technical Department.  
ROBERLO SA declines any responsibility due to an incorrect use of the product.